

# DuraVision™ FDX1001

## 10,4" Industrial Monitor

This 10,4" high quality display is designed for industrial applications. This industrial monitor is available in five different configurations: With Stand, Without Stand, Chassis, Panel Mount, Rack Mount. It features PC and AV Inputs, a Mercury-Free White LED Backlight, a Durable Construction and a Cross Line Display.




### PC and AV Inputs

A D-sub analog input is included for connecting to PCs. Composite (RCA) and S-video inputs which support NTSC, PAL, and SECAM are included for connecting to audio/visual equipment.

### Underscan and Normal Display

Both underscan and normal display settings are available. Underscan shows 100% of an image and is ideal for watching video. Normal display about 95% of the image - eliminating extraneous TV broadcasting data that sometimes appears at the edge of the screen.

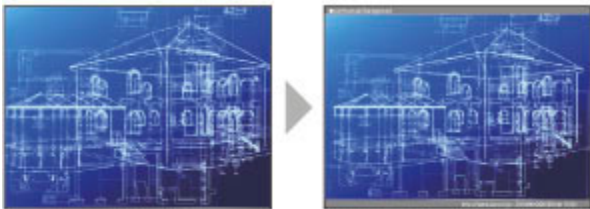

### Mercury-Free, White LED Backlight

The LED backlight is more energy efficient than the CCFL backlights used with most LCD monitors. Even at the maximum brightness setting of 600 cd/sqm, the monitor consumes just 13 watts of power. Since the backlight is mercury free, it will have minimal impact on the environment when it is disposed of.

### Durable Construction

To prevent dust or liquids from entering, the DuraVision FDX1001 does not contain any ventilation holes and there are no gaps around the perimeter of the control buttons.

### Cross Line Display

For convenience when using with an optical microscope, the DuraVision FDX1001 can display cross lines. The cross lines can be set to three different thicknesses and four different colors (black, white, green, red).



### Available in Five Configurations

To meet the needs of different industrial environments, this monitor is available in five configurations: standard (with stand), free mount (no stand), chassis, panel mount, and rack mount. For each configuration, a touch panel is optional for a total of ten variations.

### Specifications:

Panel Size	10.4" / 26 cm (263 mm diagonal)
Active Display Size (H × V)	210.4 × 157.8 mm
Panel Type	TN
Viewing Angles (H, V)	160° , 130°(at contrast ratio of 10:1)
Brightness	600 cd/sqm
Contrast	700:1
Native Resolution	1024 × 768 (4:3 aspect ratio)
Pixel Pitch	0.2055 × 0.2055 mm
Display Colors	16.77 million
Cabinet Colors	Gray, Black
Dot Clock	Analog: 65 MHz
Analog Scanning Frequency (H, V)	24 – 61 kHz, 55 – 75 kHz
Video Input Terminals	PC: D-Sub mini 15 pin AV: Composite / S-Terminal
Plug & Play	VESA DDC 2B
Power Requirements (with AC adaptor)	DC 12 V (AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz)
Power Consumption	13 W (maximum)
Power Save Mode	Less than 1.3 W
Tilt / Swivel / Pivot	30° Up / 35° Right, 35° Left
Dimensions (W × H × D)	With Stand: 252 × 255 × 175 mm / Without Stand: 252 × 216 × 43 mm
Net Weight	With Stand: 3.6 kg / Without Stand: 2 kg
Certifications and Standards	CUDO certified mark, c-Tick, CE, CB, DDC2B, VCCI-B, RoHS, WEEE
Supplied Accessories	AC adaptor, PDF user's manual with warranty card, clumper, 4 screws for mount option
Warranty	Two Years

Avnet Technology Solutions: Deutschland ♦ +49 (0)2153 733-400 ♦ www.eizo.de Österreich ♦ +43 (0)1-61488-0 ♦ www.eizo.at